Sandberg®
ACTIVE

Survivor Radio All-in-1 5000


Quick Guide

421-03




www.sandberg.world

Product overview

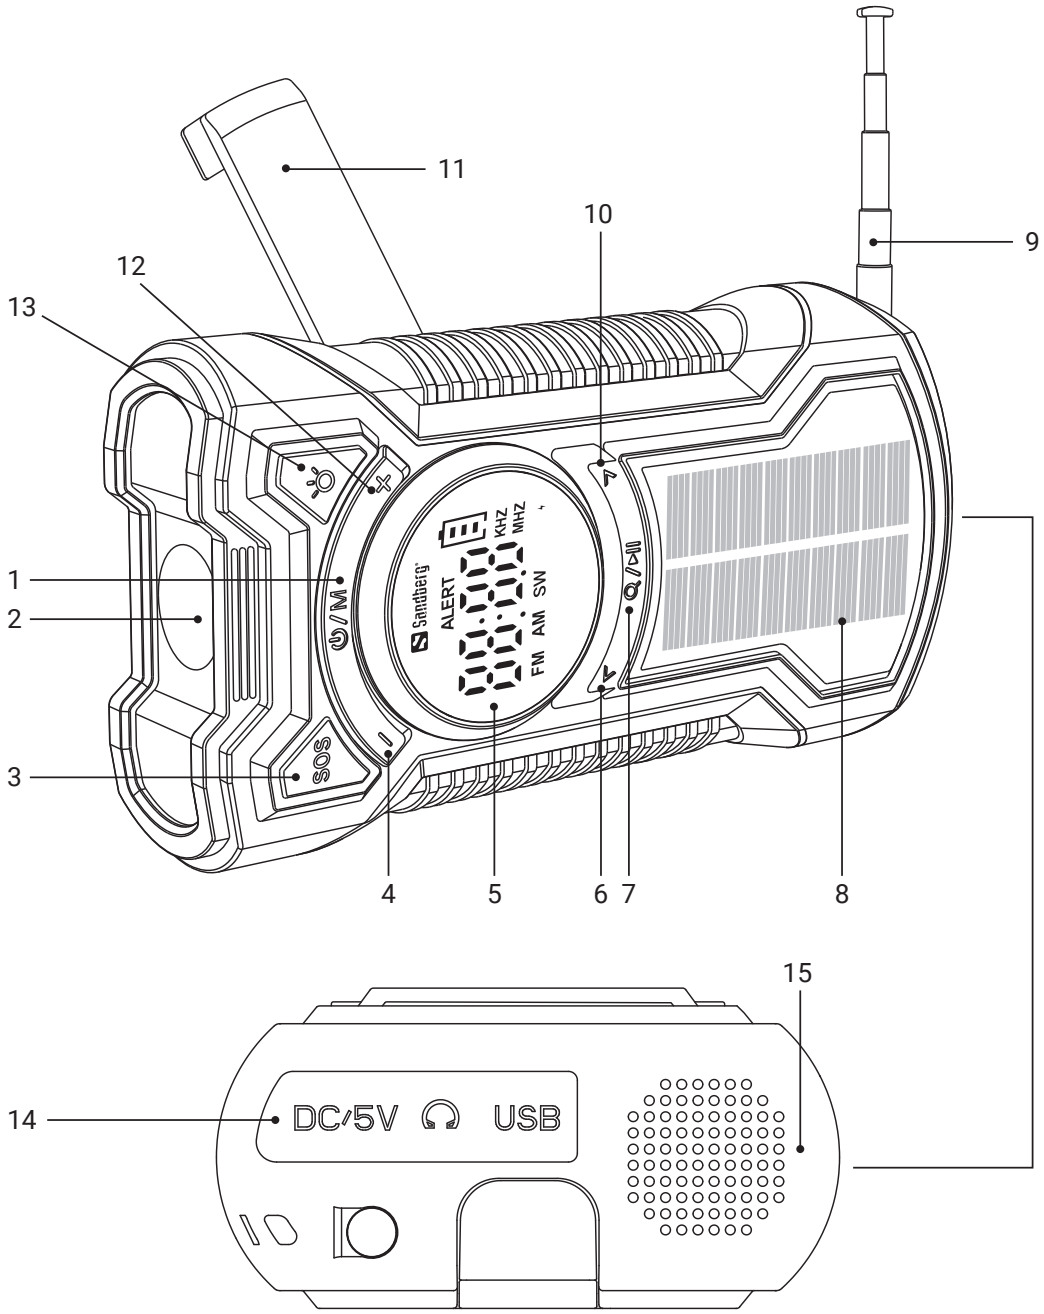

1. Power / Mode switching
2. Lights
3. SOS
4. Volume -
5. Display
6. Skip station / song <
7. Search/Select/Pause
8. Solar panel
9. Retractable antenna
10. Skip station / song >
11. Hand crank
12. Volume +
13. Light switching
14. Charging / Headphone
15. Speaker


Display overview

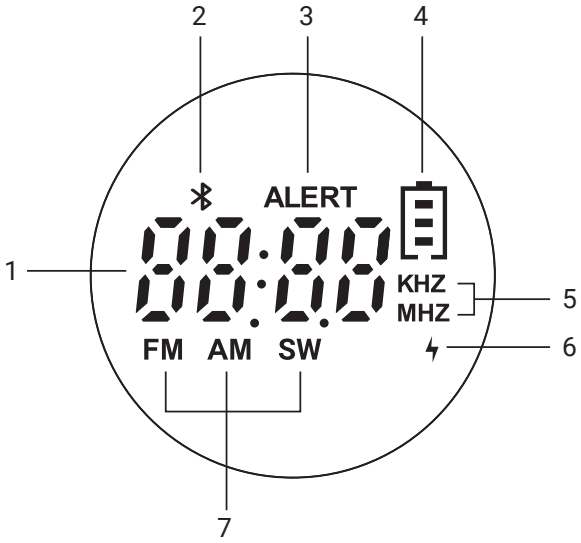

1. Information display (Numbers or text 4 digits)
2. Bluetooth speaker mode
3. WB weather alert on
4. Battery status
5. Frequency KHz / MHz
6. Charge indicator
7. Radio mode FM / AM / SW

Charging the internal battery


Hand crank

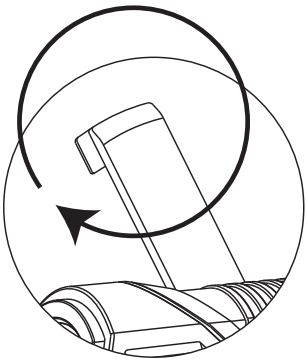

Turn the crank at 120 - 150 rpm (2 - 2.5 times per second). 1 minute of turning can power the radio for about 3 minutes.

Approximately charging time by the hand crank (battery 0-25%): 5 hours


Solar panel

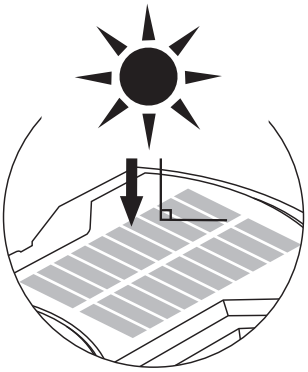


Make sure to place the solar panel in direct sunlight with no shadow.

Approximately charging time by the solar panel (battery 0-25%): 20 hours

AC charger

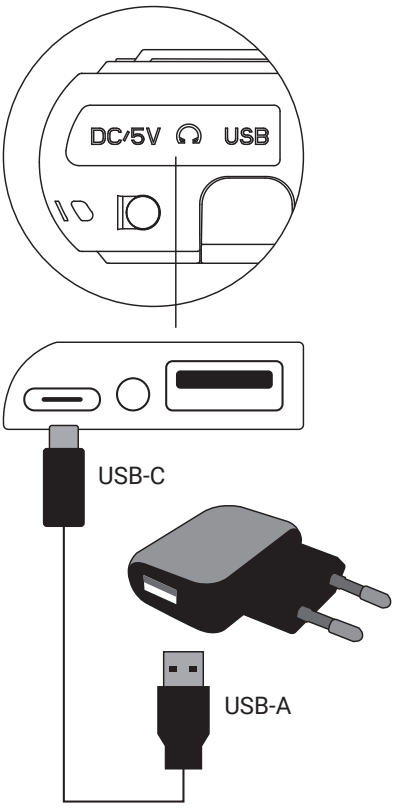

Charge device

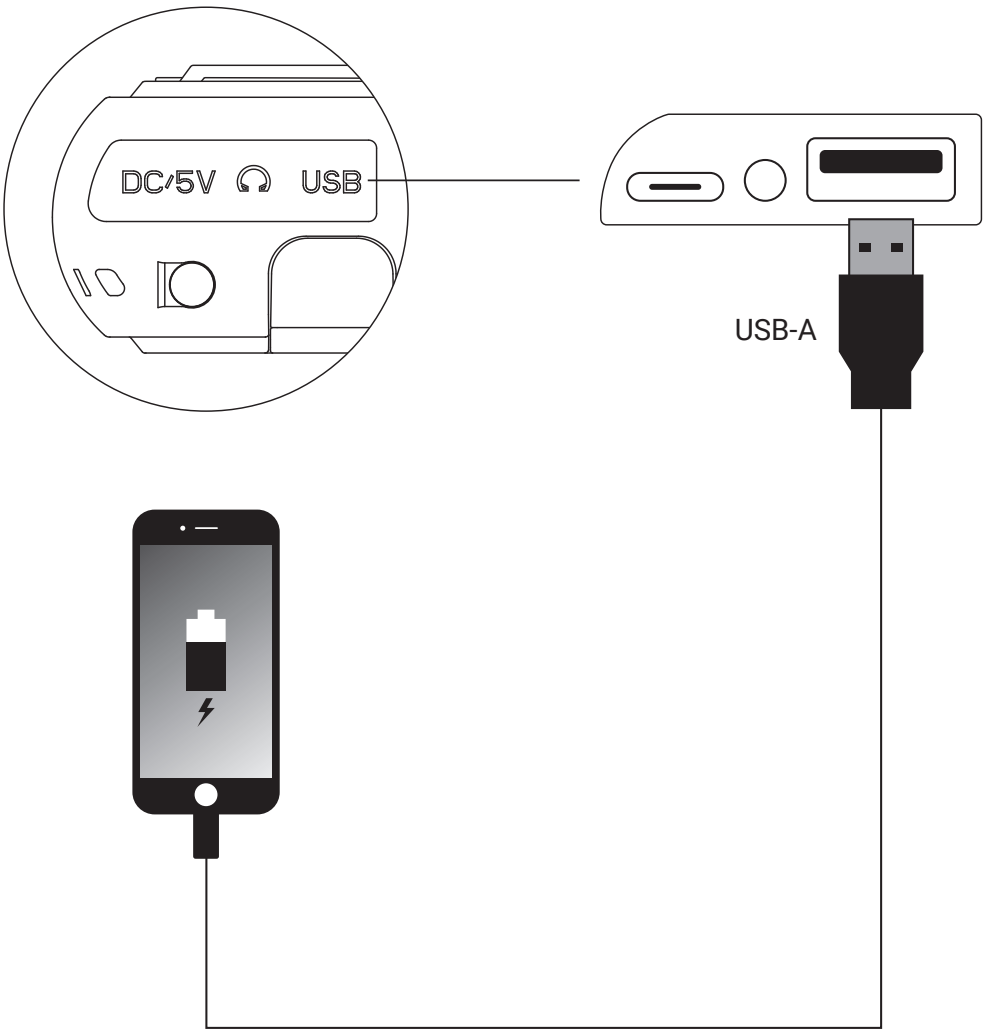

Operation

Symbol	Press	Function
⏻/M	Long (3 sec)	Power on/off

Symbol	Press	Function	Options
⏻/M	Short (toggle)	Select mode	FM
⏻/M	Short (toggle)	Select mode	AM
⏻/M	Short (toggle)	Select mode	SW
⏻/M	Short (toggle)	Select mode	Bluetooth

Symbol	Press	Function	Options
◁ ▷	Short (toggle)	Select songs forward / backwards	Skip-next/previous
🔍/▷II	Short (toggle)	Pause/Play	-

Symbol	Press	Function	Options
◁ ▷	Short	Frequency up / down	Manual setting
◁ ▷	Long	Frequency up / down	Auto search
🔍/▷II	Long	Full auto search and storage	P01-P99
🔍/▷II	Short (toggle)	Select prestored channels	P01-P99

Speaker volume setting

Symbol	Press	Function	Options
—	Short (repeating)	Volume down	Steps 0-27
+	Short (repeating)	Volume up	Steps 0-27

SOS alarm (Warning! Loud horn sound and red light)

Symbol	Press	Function	Options
SOS	Short (first time)	Activate SOS alarm horn & light	-
SOS	Short (second time)	Deactivate SOS alarm horn & light	-


LED light

Symbol	Press	Function	Options
	Short (toggle)	Turn on/off center torch	Long beam
	Long (toggle)	Turn on/off side torches	Short beam

Bluetooth Mode


When no device is connected, it will be visible for your Bluetooth search.

1

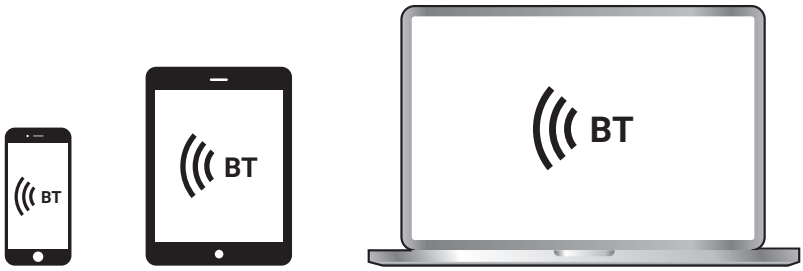

Turn on Bluetooth on your mobile phone or tablet or computer.

2

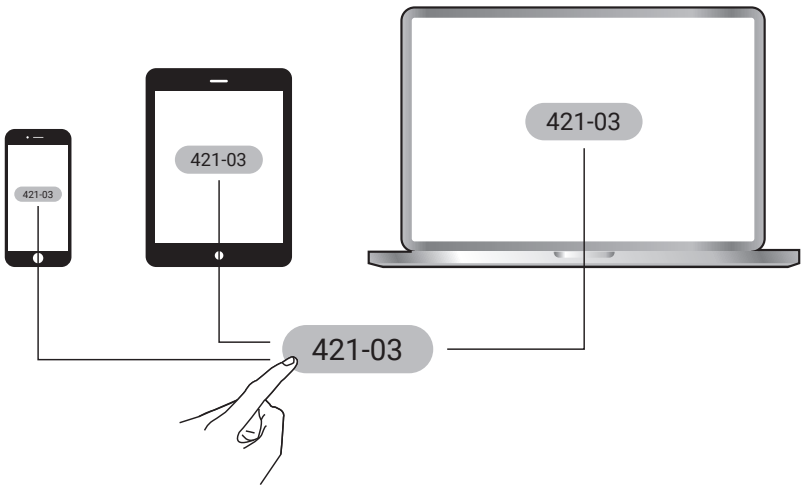

Look for “421-03” in your Bluetooth search list and select connect.

CE letter of conformity

Declaration of Conformity

Manufacturer:	Sandberg A/S
Address:	Bregneroedvej 133D, 3460 Birkeroed, Denmark
Product description:	Multi device of powerbank, AM+FM radio, speaker and lamp
Product name/Type no:	Survivor Radio All-in-1 5000 / 421-03

We declare under our sole responsibility that the products, to which this declaration relates, are in conformity with the Council Directives on the approximation of the laws of the EEC Member States relating to the following:

Directives

EMC Directive 2014/30/EU
RED Directive 2014/53/EU
RoHS Directive 2011/65/EU with amendment (EU)2015/863:

And standards

EN IEC 62368-1:2020+A11:2020
EN 62479:2010
ETSI EN 301 489-1 V2.2.3 (2019-11)
EN 301 489-17 V3.2.4 (2020-09)
ETSI EN 303 345-1 V1.1.1:2019
ETSI EN 303 345-2 V1.2.1:2021
ETSI EN 303 345-3 V1.1.1:2021

Date: 15th June 2024

Location: Birkeroed, Denmark

Name: Anders Petersen

Signature

Sandberg ACTIVE

Support

helpdesk.sandberg.world

Warranty

There is a five-year warranty on your Sandberg product. Please read the warranty terms and register your new Sandberg product at www.sandberg.world/warranty

5 Years Warranty

Survivor Radio All-in-1 5000

Capacity: 5000 mAh (18.5 Wh)
Solar Panel Voltage: 5V, 95 mA (0.48W max)
Hand crank power: 5V, 380 mA (1.9W max)
USB-A output: 5V/2A USB-C input: 5V/1.5A
Radio AM: 522 - 1710KHz
Radio FM: 87.0 - 108.0 MHz
Product weight: 304.5g

Item no. 421-03
www.sandberg.world
info@sandberg.world
Sandberg A/S
Bregneroedvej 133D,
3460 Birkeroed, Denmark
Made in China

NOTE: If not used regularly, please recharge the powerbank at least every 3 months to maintain optimal performance.

For information on handling electronic waste, see www.sandberg.world/weee